

VANDAL-PROOF OUTDOOR CAMERA

INSTALLATION

The camera is supplied with a mounting kit for attaching to a wall. Before you affix the camera in position, please ensure the cable is of adequate length to reach the DVR.

To mount the camera on a wall or ceiling:

1. Ensure the surface you want to mount the camera on is solid and can support the weight.
2. Accurately mark on the wall the position of the 4 holes to be drilled.
3. Drill to the correct depth in the wall, as indicated by the plugs.
4. Drill a larger hole in the middle of the 4 other holes, right through the wall. Use this hole for the attached cable.
5. Insert plugs into the drilled holes.
6. Secure the bracket to the wall using the provided screws.




To position the camera:

1. Using the supplied Allen key, loosen the two Allen screws and adjust the camera to the desired position.
2. Re-tighten the screws using the Allen key, to lock the camera in place.

To connect the camera via BNC:

1. Align the BNC connector with the notches on the BNC socket and slide into place.
2. Rotate the BNC connector clockwise until it locks in place.

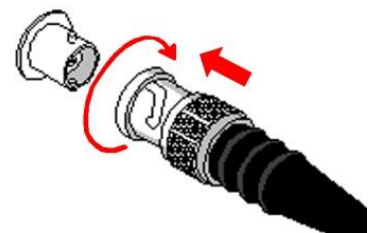

To connect the camera to a mains supply:

1. Connect the DC plug from the power supply unit into the DC socket on the camera cable.
2. Plug the mains adapter into a mains socket.

