

## VANDAL-PROOF DOME CAMERA

### INSTALLATION

The camera is supplied with a mounting kit for attaching to a ceiling. Before you affix the camera in position, please ensure the cable is of adequate length to reach the DVR.

To mount the camera on a ceiling or wall:

1. Ensure the surface you want to mount the camera on is solid and can support the weight.
2. Accurately mark on the wall the position of the 2 holes to be drilled.
3. Drill to the correct depth in the wall, as indicated by the plugs.
4. Drill a larger hole in the middle of the 2 other holes, right through the wall. Use this hole for the attached cable.
5. Insert plugs into the drilled holes.
6. Secure the camera to the wall using the provided screws.




The camera already has 2 screws in place which hold the chassis together.

To position the camera:

1. Loosen the screws and adjust the camera to the desired position.
2. Re-tighten the screws.

To connect the camera via BNC:

1. Align the BNC connector with the notches on the BNC socket and slide into place.
2. Rotate the BNC connector clockwise until it locks in place.

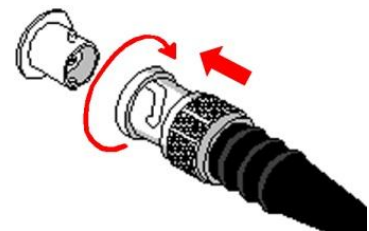

To connect the camera to a mains supply:

1. Connect the DC plug from the power supply unit into the DC socket on the camera cable.
2. Plug the mains adapter into a mains socket.

